

Pressure-Rating of the sensor probe	As specified in order confirmation
Material	316L
Process connection	Tri-Clamp D34
Compatible with	ISO 1127 DN 10* / 15 / 20
	DIN 32676 DN 15 / 20
Order Code	SRD-X4-05T

*seal gasket will be over the weld line, care should be taken to use sufficiently conformal gaskets to seal



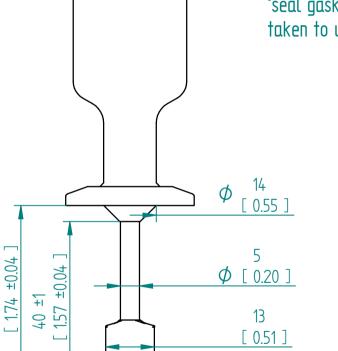

Units: [inch]

SRD-X4-05T Flush Tri-Clamp D34

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

rheonics inline process density and viscosity monitoring

Protected by US and International patents granted and pending

Prheonic

rheonics • Switzerland • USA • www.rheonics.com • info@rheonics.com +41 52 511 32 00 +1 713 364 5427 Release: 2404

127 ±1 5.01 ±0.04

ŦI

4