SlurrySense with CleanWaveTM

Product Launch Summary

Process Challenge



Mounting base plate attached to the fixed tank. Rheonics SlurrySense

Value Outcomes

The tighter control of viscosity and density made possible with continuous inline measurements in slurry tanks ensures viscosity and solid weight deviations are caught early and product wastage due to slurry consistency changes can be avoided. The consistent control of viscosity ensures uniform shell thickness, slurry adhesion to wax details, and surface finish. Shell strength, thermal conductivity, flexibility, and permeability are reliably steady when slurry consistency is dependable.


Sustainability goals are also addressed with SlurrySense viscosity and solids content control via improvements in mixing efficiency and reduction of product waste.

Rheonics Solution

Through our existing investment casting customers, a noted problem in shell rooms is the tendency for deposits to form on instrumentation in the slurry tanks. The existing Rheonics inline process density meters and viscometers resist deposit formation in many slurries, but with the most sticky slurries, the build up of these deposits can require cleaning protocols and checks to be added to already busy operator schedules.

Instrumentation that can operate fully hands-off is therefore desired to further automate critical continuous slurry density and viscosity measurements.



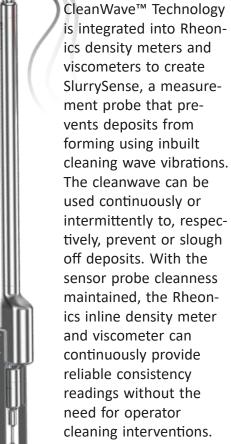



Rheonics SlurrySense



Rheonics APC and Mounting



rheonics GmbH

Zuercherstrasse 41 8400 Winterthur Switzerland +41 52 511 32 00 rheonics Inc.

3 Sugar Creek Center Blvd, Ste 100 Sugar Land, TX 77478 United States of America +1 713 364 5427









www.rheonics.com info@rheonics.com