
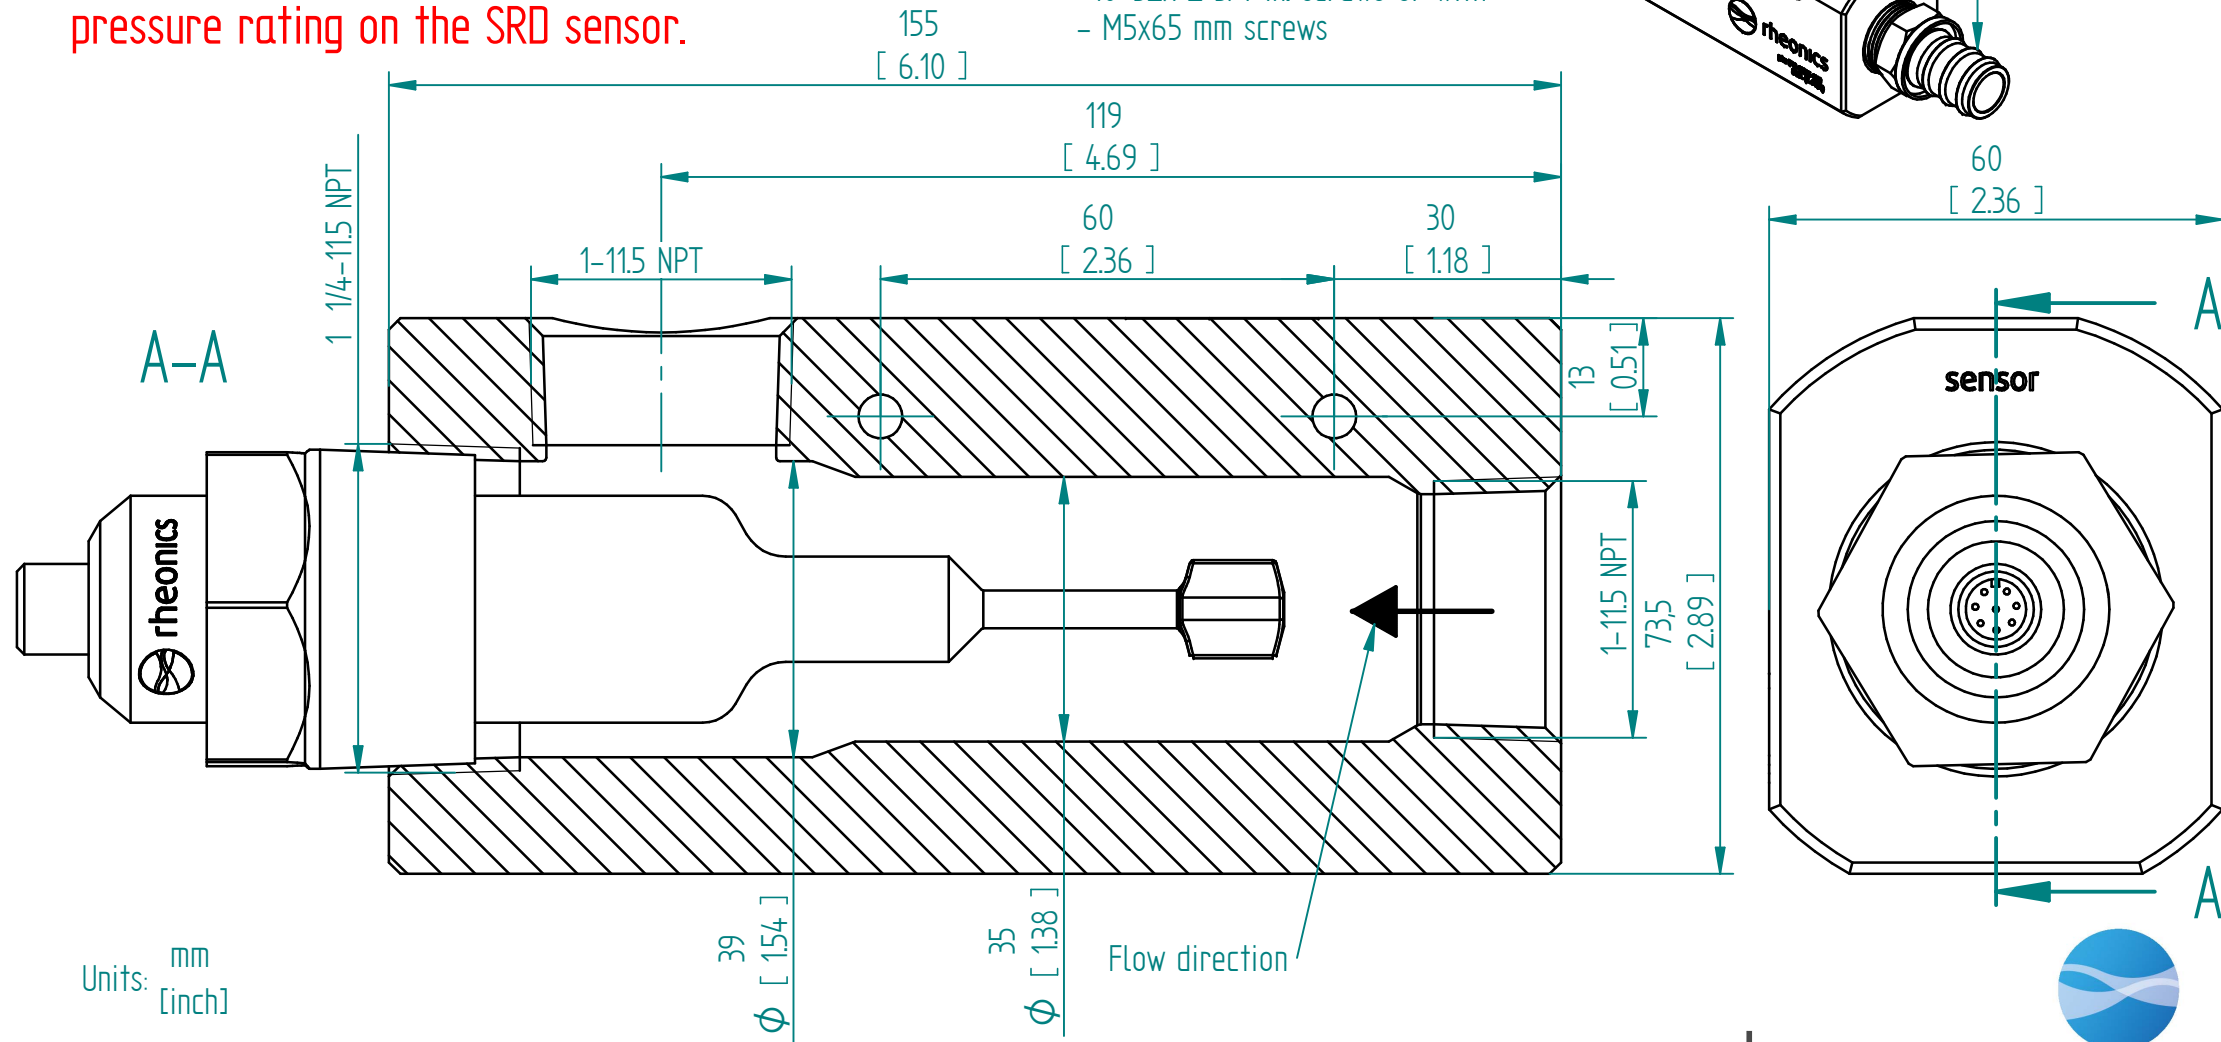


Max. pressure rating	100 bar (1500 psi)
Material	316L
Fluid volume	110 ml

Only to be used with correct pressure rating on the SRD sensor.

Mount with two
-10-32x 2 3/4 in. screws or with
- M5x65 mm screws

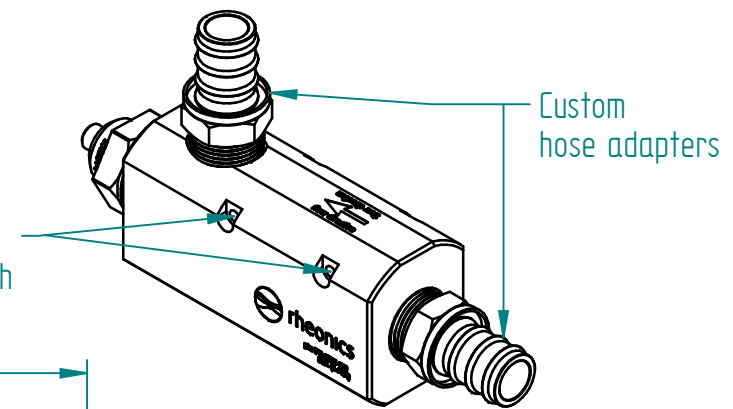

rheonics




inline process
density and viscosity
monitoring

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

Protected by US and International patents granted and pending

rheonics • Switzerland • USA • www.rheonics.com • info@rheonics.com +41 52 511 32 00 +1 713 364 5427

Release:2405

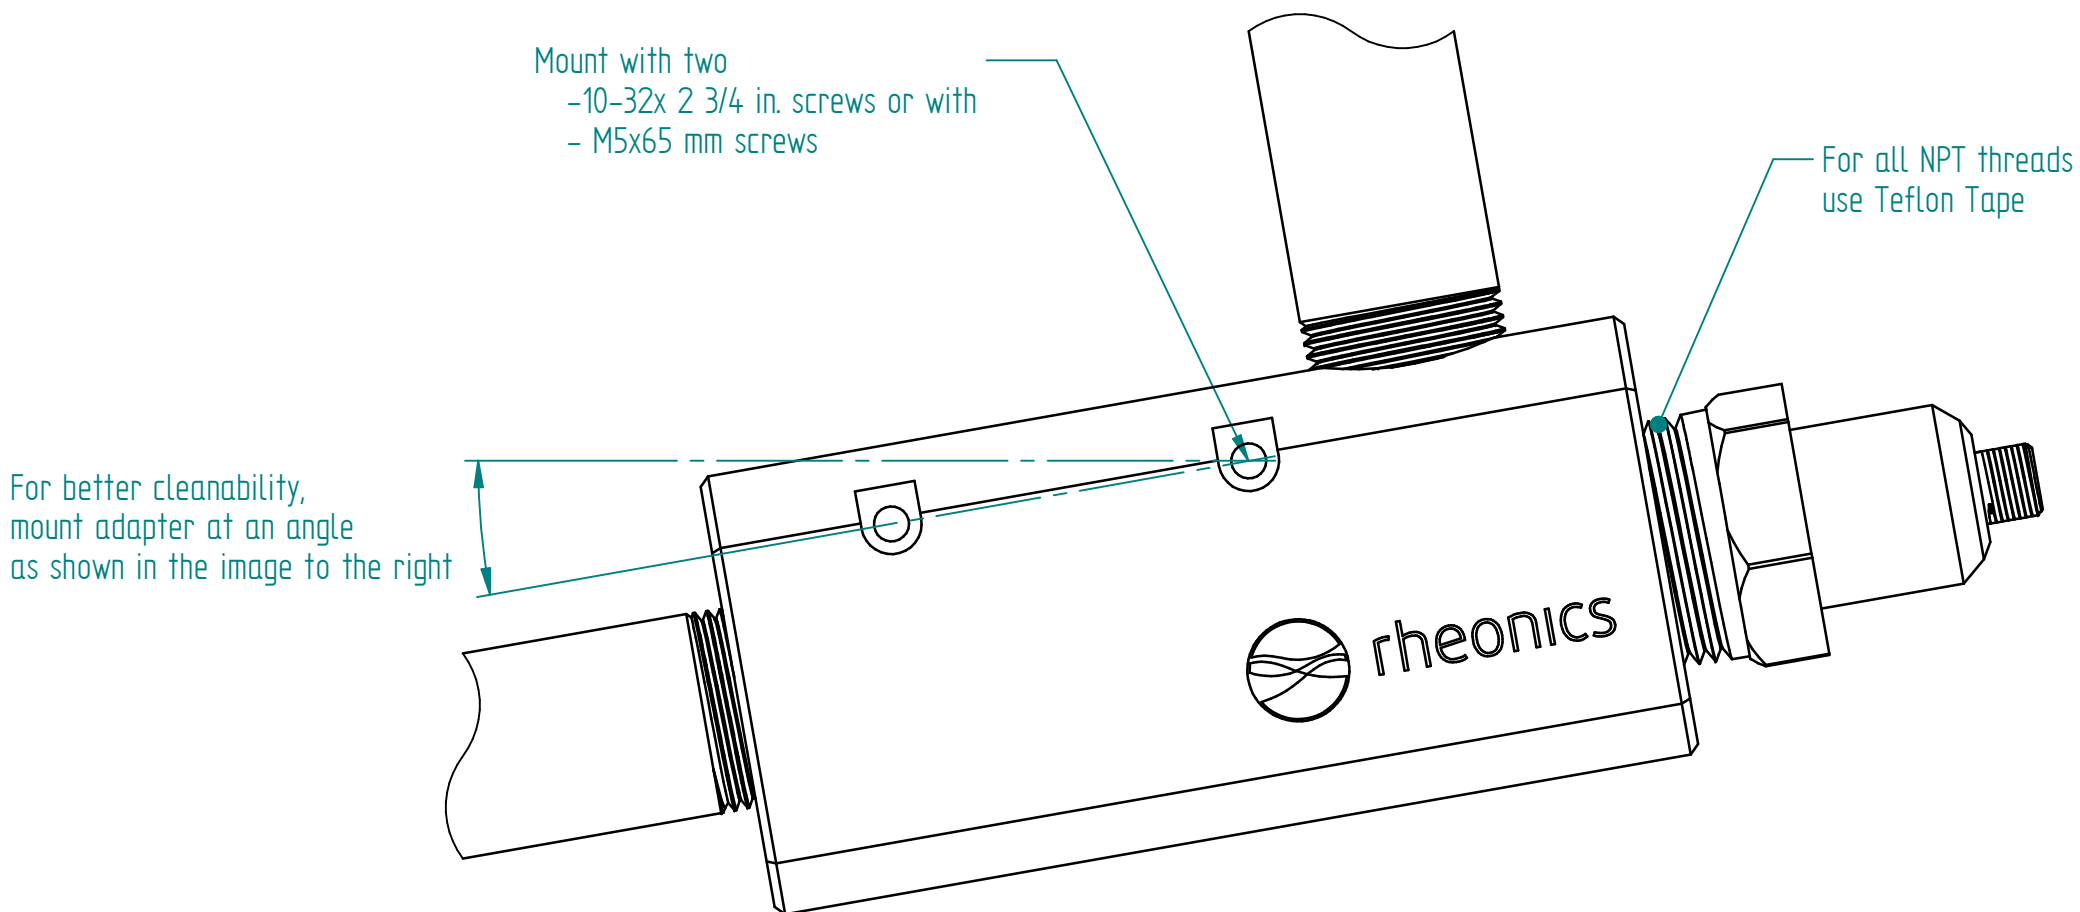

Units: mm
[inch]

SRD Long Probe 1.25" NPT IFC-1N25-1N0

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

Protected by US and International patents granted and pending

rheonics • Switzerland • USA • www.rheonics.com • info@rheonics.com +41 52 511 32 00 +1 713 364 5427

Release:2405

rheonics



inline process
density and viscosity
monitoring